
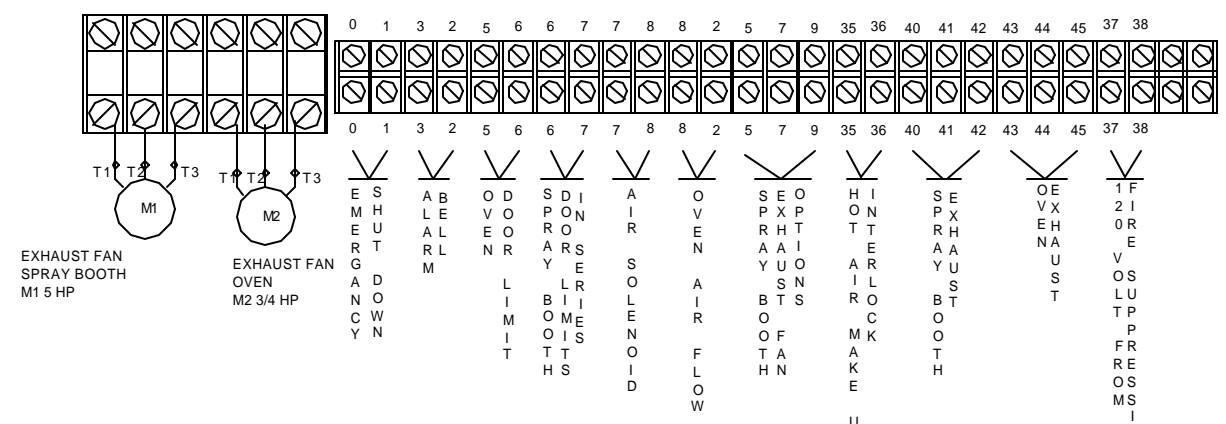


- NOTES:
1. SYSTEM WIRED FOR SEPERATE OPERATION OF SPRAYBOOTH AND OVEN
 2. TERMINAL 0 & 1 MAY BE USED AS AN EMERGENCY SHUTDOWN SWITCH
 3. DRIVE THROUGH DOORS REQUIRE 2 MICRO SWITCHES (WIRE BETWEEN TERMINALS #5 AND #6)
 4. DO NOT LOCATE CONTROLLER WITHIN 3 FEET OF ANY BOOTH OPENING
 5. DIGITAL TIMER STARTS QUARTZ HEATERS
 6. DIGITAL CONTROLLER CONTROLS HEAT VOLUME OF QUARTZ HEATERS
 7. REFER TO AIR MAKEUP WIRING DIAGRAM FOR ALL CONNECTIONS ON HOT AIR MAKEUP TERMINAL STRIP
 8. MOVE JUMPER FROM TERMINAL 9 AND 5 TO 9 AND 7 IF YOU WANT THE EXHAUST FAN TO RUN WHEN DOORS ARE OPEN

10 GAUGE SF2 WIRE
TYPICAL 25 PLACES

8 ga THHN WIRE
FROM EACH FUSE HOLDER
TO EACH HEAT ZONE

NOTE: MAKE SURE ALL CONNECTIONS ARE TIGHT

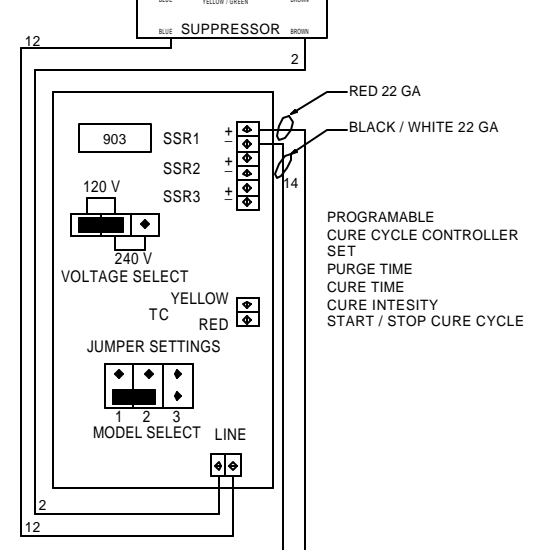

THIS DRAWING INCLUDING THE PRINCIPAL OF DESIGN IS THE PROPERTY OF INFRATECH AND IS SUBMITTED WITH THE AGREEMENT THAT IT IS NOT TO BE USED IN ANY MANNER THAT MAY CONSTITUTE A DETRIMENT DIRECTLY OR INDIRECTLY TO INFRATECH. ACCEPTANCE OF THIS DRAWING WILL ACKNOWLEDGE THE FOREGOING AGREEMENT.

THIS SYSTEM IS PROTECTED BY US PATENT NO. 4621187

INFRATECH <small>a SEACHROME company</small>		939 NORTH VERNON AVE AZUSA CA. 91702 626-334-3252
DESCRIPTION	SOLID STATE DRIVE THROUGH CONTROL	
CUSTOMER		
DATE	02-15-02	ITEM #
		DRAWING 4009-E